

Stretch Wrapping. Case Handling. Shrink Packaging. Palletizing. Conveying.

## C-1000/C-2000

Automatic Case Erectors




Lantech Case Erectors Deliver Square Cases . . .

... And Don't Jam!



## C-1000/C-2000

## **Overcome Common Case** Manufacturing Variations . . .

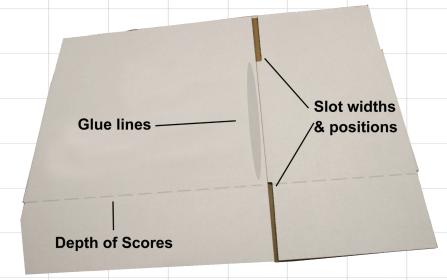



Unique hinged pickup and folding frame reliably opens cases by placing erecting frame suction cups on two panels of blanks



Innovative slotted flap folders fold major flap along their entire length for maximum control



All flaps are folded while case is held square in the erecting frame



Belt driven exit pulls case over tape head or optional glue station

## C-1000/C-2000 Specifications

PERFORMANCE CRITERIA** ■ Throughput Speed ■ Case Size Minimum (O.D.)	<b>C-1000</b> 15-22 cases per minute 7 7/8"L x 5 7/8"W x 3 7/8"H	<b>C-2000</b> 10-15 cases per minute 7 7/8"L x 5 7/8"W x 3 7/8"H
■ Case Size Maximum (O.D.)	19 3/4"L x 12 3/4"W x 18 3/4"H	25 5/8"L x 17 3/4"W x 23 7/8"H
** Minimum and maximum case heights vary depending on case widths.		
CASE CRITERIA  ■ Case Type	RSC, HSC	RSC, HSC
■ Flute Type ■ Wall Type	B, C Single wall (test for double wall)	B, C Single wall (test for double wall)
<b>BOTTOM SEAL</b> ■ Bottom sealing method	Tape (Glue Optional)	Tape (Glue Optional)
■ Tape Head Series	Lantech TH Series	Lantech TH
MACHINE SHIPPING WEIGHT ■ Shipping Weight (including skid)	1600 lbs.	2000 lbs.

Specifications subject to change without notice. Lantech systems and sub-systems are protected by U.S. and foreign patents. Additional U.S. and foreign patents pending. © Lantech 2011

80 psi, clean dry air

3 years

230v, 3ø, 15amp, 60Hz

C-1000/C-2000 Rev. 01/05/12

Page 2 of 2

MEMBER

РММІ

SERVICE REQUIREMENT

■ Electric

WARRANTY

80 psi, clean dry air

3 years

230v, 3ø, 15amp, 60Hz