



Leanwrap™

Less Waste, Safer Loads!

Patented and patent pending innovations that overcome today's stretch wrapping challenges!



RL Automatic

Stretch Wrapping System

The right containment force applied consistently is the key to stretch wrapping success.

Loads are Harder to Wrap Than Ever!

Today's stretch wrapping challenges have spawned an epidemic of fragile and demanding loads that are harder than ever to wrap. Yesterday's technology doesn't give you the tools to know if your loads are safe to ship.

So we reinvented stretch wrapping.

Our exclusive, patented LeanWrap features give you what you need to manage the performance of your loads and overcome today's stretch wrapping challenges.

Stop breaking stretch film. Stop twisting loads. Stop loads from sliding off the pallets. Stop destructive film tails. Stop guessing if your loads are safe to ship.

Take control of your stretch wrapping.

LeanWrap technology gets you less waste and safer loads.



Good Loads

- Containment force is at or above the minimum requirement everywhere on the load.
- The load is bonded to the pallet with 3-5 inches of film rolled into a cable.
- Looks good. No long or dragging film tails.

"Good loads are safe to ship."


Lantech®

RL Automatic

Exclusive LeanWrap Innovations



Metered Film Delivery System

- No load twisting
- No load crushing
- No film breaks

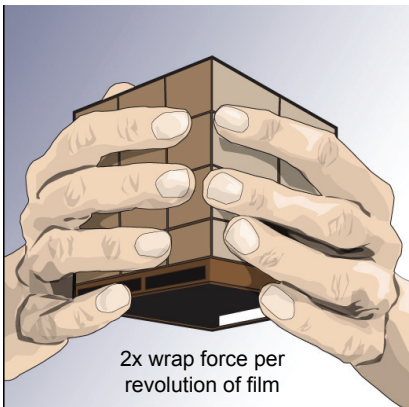

Pallet Grip®

Stop loads from sliding off the pallet

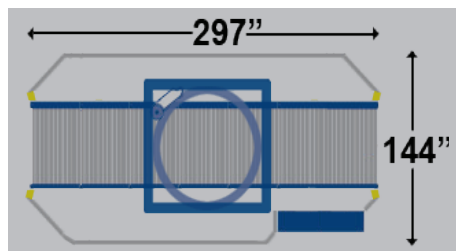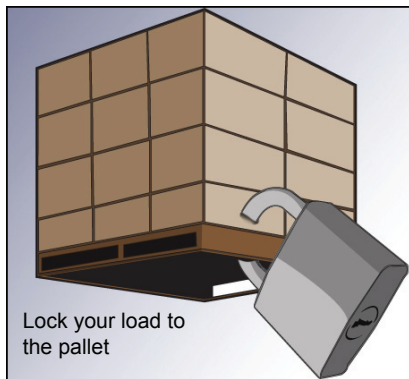


RL Automatic



Machine Generated Performance Data

Built in process controls to provide detailed wrap and production data. Know your containment force on every load, every day. Plus a host of other key stretch wrapping metrics.

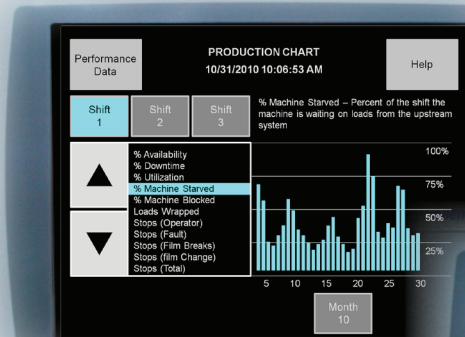

Stop Guessing!



Knowledge is power!

Specifications

PERFORMANCE CRITERIA

Production Speed	90-180 loads per hour based on load height
Maximum Load Size	50"L x 50"W x 110"H
Minimum Load Size	36"L x 36"W x 24"H
Maximum Load Weight	Conveyor Capacity

LOAD HANDLING SYSTEM

Rotation Drive	TEFC AC Motor
Rotation Speed	1-60 RPM controlled by VFD

FILM DELIVERY SYSTEM

Film Capacity	20" web with 10" diameter
Film Cut and Clamp	Press & Seal
Pallet Grip	Standard

ELECTRICAL DATA

Enclosure	NEMA 12, UL
Power	460VAC/3/60Hz 10K SCCR w/breakers
Control	PLC with Ethernet Communication
HMI	Touchscreen
Wiring	Pre-wired with quick connect cables

PNEUMATIC DATA

All Requirements	3-5 cfm at 60-80 PSI
------------------	----------------------

CONTAINMENT FORCE TOOL

CFT-5 with Film Scale and Holder	
----------------------------------	--

SHIPPING WEIGHT


Machine Only	7,400 lbs.
--------------	------------

SERVICE SUPPORT

Warranty	1 year unlimited cycles
Technical Support	24 hrs/7 Days

Get the Outcomes You Expect

Manage and improve your stretch wrapping with real time information about the machine's performance.

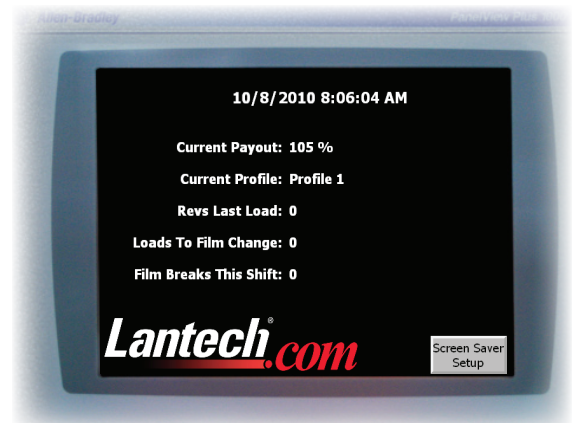

Specifications subject to change without notice. Lantech systems and sub-systems are protected by U.S. and foreign patents. Additional U.S. and foreign patents pending. © Lantech.com 2012