

## S-300XT

Simple Automation™  
Stretch Wrapping System

# It's a Lantech!

## Work smarter ... keep your driver on the fork truck!

- Patented XT Cut and Clamp® automatically captures the stretch film and cuts it at the end of the wrap cycle.
- Save two minutes of fork truck driver labor per load.
- No scheduled preventative maintenance.




S-300XT


# S-300XT

**Eliminate the "run-around" with Simple Automation in a fast - paced environment.**

*S-300XT automatically attaches and cuts the film. Equipped with a fully protected mechanical cut & clamp. Improve productivity by keeping the operator on the fork truck.*

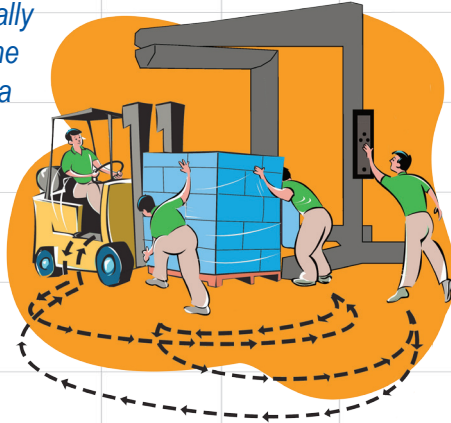

**121"  
Height**

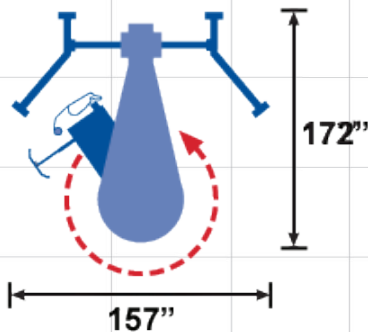

**Boost your machine's performance with these patented features:**

## Click-n-Go™

**Stretch Wrapping Loads at the Touch of a Button!**



Enhances portability by eliminating requirement to install a ceiling-mounted lanyard.

Each unit can handle up to 3 machines.

Click-n-Go remote meets the latest safety requirements outlined by the National Electrical Code. Using infrared technology and two-step activation process, the Click-n-Go is immune to accidental activation from stray radio frequency.

## S-300XT Specifications

### PERFORMANCE CRITERIA

■ Production Speed	30-40 loads per hour
■ Maximum Load Diagonal	76"
■ Maximum Load Height	80"

### FILM DELIVERY SYSTEM

■ Power-Roller Stretch Plus System	200% Standard (100%-300% available at no charge)
■ Wrapping Force	Electronically controlled
■ Film Capacity	10" Roll Diameter, 20" Film Web Width
■ E-Z Thread Roll Carriage	Standard
■ Pallet Grip®	Standard

### MACHINE SHIPPING WEIGHT

■ Machine Size	144"Wx157"Lx121"H
■ Shipping Weight	3300 lbs. (including skid - approximate)

### ELECTRICAL REQUIREMENTS

■ Machine Voltage	115V, 20 Amp
■ Microcontroller	Standard
■ UL-Approved NEMA 12/enclosure	Standard

### SERVICE SUPPORT

24 hrs/7 days a week

Specifications subject to change without notice. Lantech systems and sub-systems are protected by U.S. and foreign patents. Additional U.S. and foreign patents pending. © Lantech 2012

## Tons of options available

30" Film Delivery System  
15 RPM Wrap Arm Speed  
110" Wrap Height  
Base Mount  
Cold Package  
Extended Warranty  
Lexan Plastic Cover  
Pre-stretch Gears 100-300%  
Seismic Protection Package  
Static Collection Brush  
Top Sheet Wrap  
Two-Speed Roll Carriage and Wrap Arm  
Wrap Cycle Pause . . . and more!

